



Best Seller

2~8°C Pharmacy Refrigerator

Intelligent Control & Constant Temperature
Multiple Alarms Bring More Security

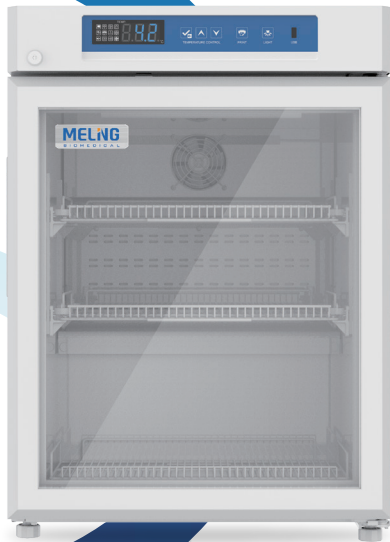

YC-75L



Temperature Uniformity



Pulling Down to 5°C



Temp. Recovery After Door Opened for 1 Min

**Typical freezer data based on internal testing with freezer set point at 5°C and ambient temperature at 22°C.*

Features

Temperature Control System
Display temp. in 0.1°C increments

Compact and Fit
Fits under standard 34" high ADA compliant countertop


HC Nature Hydrocarbon Refrigerant
Environment-friendly natural gas



CE Certificate

Double-pane Glass Door
Automatic electric heating function

Data Logger
Can log 100000 pcs data, 12 months of data can be exported via USB port

Structure

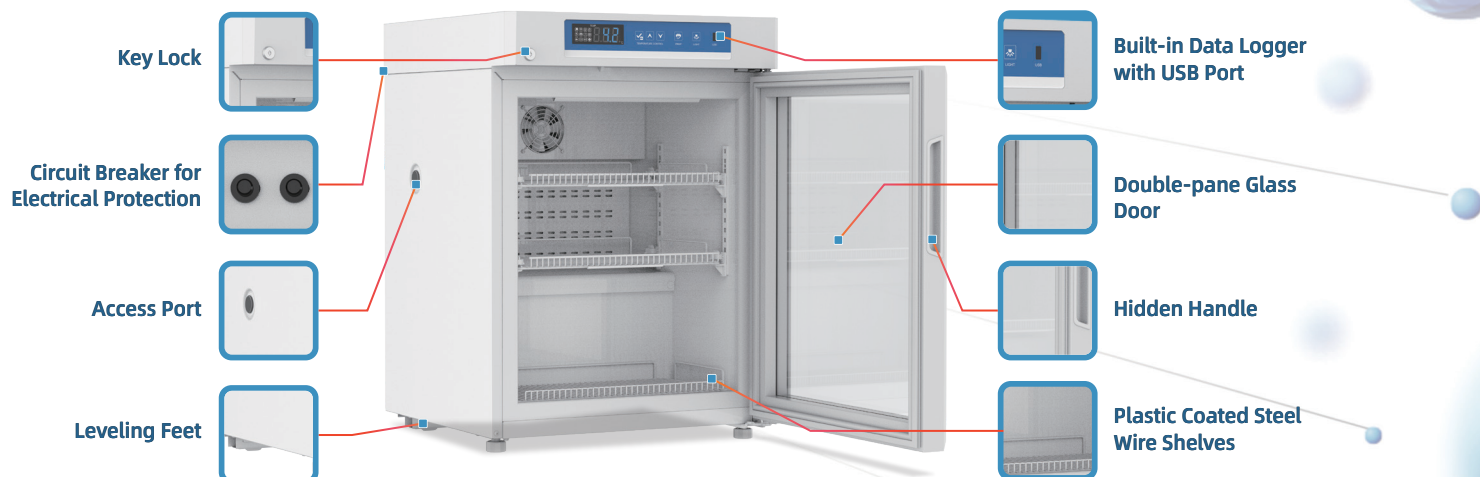

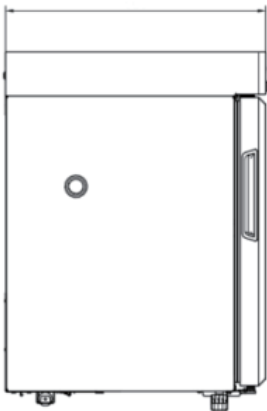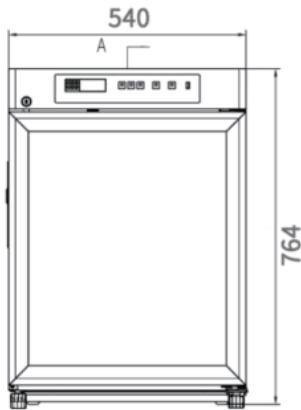

2~8°C Pharmacy Refrigerator		
Model	YC-75L	
Capacity	75L/2.65Cu.Ft	
Internal Size (W*D*H) mm/Inch	444×440×536/17.48*17.32*21.10	
External Size (W*D*H) mm/Inch	540×560×764/21.26*22.05*30.08	
Package Size (W*D*H) mm/Inch	575×617×815/22.64*24.29*32.09	
NW(Kgs/LBS)	41/90.39	
GW(Kgs/LBS)	45/99.21	
Performance		
Temperature Range	2~8°C	
Ambient Temperature	16~32°C	
Cooling Performance	5°C	
Climate Class	N	
Controller	Microprocessor	
Display	Digital Display	
Refrigeration		
Compressor	1pc	
Cooling Method	Forced Air Cooling	
Defrost Mode	Automatical	
Refrigerant	R600a	
Construction		
External Material	PCM	
Inner Material	Sprayed Aluminum Plate	
Shelves	3(Coated Steel Wired Shelf)	
Access Test Port	1pc. Ø 25 mm	
Casters	2+(2 Leveling Feet)	
Data Logging/ Interval /Recording Time	USB/Record Every 10 Minutes/100.000 Data	
Interface	Remote Alarm Contact, RS485	
Backup Battery	Yes	
Alarms		
Temperature	High/Low Temperature, High Ambient Temperature	
Electrical	Power Failure, Low Battery, Sensor Error	
System	Data Communication Failure, Door Ajar, Data Logger Failure	
Electrical		
Power Supply(V/Hz)	110V/60Hz	220-240V; 50/60Hz
Rated Current(A) Data	1.24A	0.92A/0.56A