


Best Seller

2~8°C Pharmacy Refrigerator

Intelligent Control & Constant Temperature
Multiple Alarms Bring More Security



YC-55L



Temp. Uniformity



Pulling Down to 5°C



Temp. Recovery After Door Opened for 1 Min

**Typical freezer data based on internal testing with freezer set point at 5°C and ambient temperature at 22°C.*

Features



Temperature Control System
Display temp. in 0.1°C increments



Compact and Fit
Fits under standard 34" high ADA compliant countertop



Hydrocarbon Refrigerant
Environment-friendly Natural Gas



CE Certificate





Double-pane Glass Door
Automatic Electric Heating Function



Alarms System

Structure



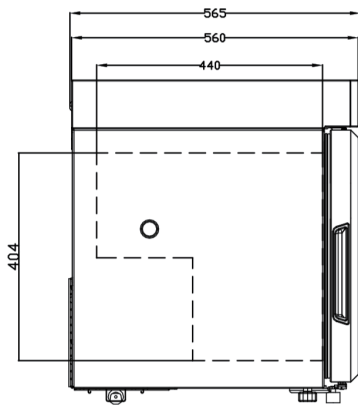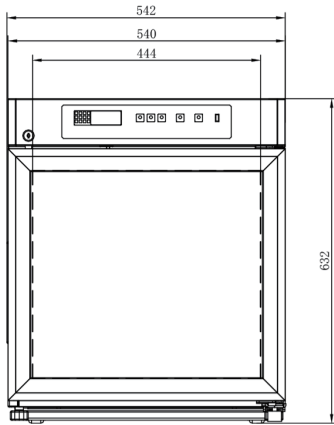

2~8°C Pharmacy Refrigerator		
Model	YC-55L	
Capacity	55L/1.94Cu.Ft	
Internal Size (W*D*H) mm/Inch	444*440*404/17.48*17.32*15.90	
External Size (W*D*H) mm/Inch	540*560*632/21.20*22.00*24.90	
Package Size (W*D*H) mm/Inch	575*617*682/22.64*24.30*26.85	
NW/GW (kgs)	35/41	
Performance		
Temperature Range	2~8°C	
Ambient Temperature	16~32°C	
Cooling Performance	5°C	
Climate Class	N	
Controller	Microprocessor	
Display	Digital Display	
Refrigeration		
Compressor	1pc	
Cooling Method	Forcedair Cooling	
Defrost Mode	Automatical	
Refrigerant	R600a	
Insulation Thickness	D:55, L/R:48, B:50	
Construction		
External Material	PCM	
Inner Material	Sprayed Aluminum Plate	
Shelves	2(Plastic Coated Steel Wire Shelves)	
Access Test Port	1pc. Ø25mm	
Casters	2+(2 Leveling Feet)	
Data Logging/ Interval /Recording Time	USB/Record Every 10 Minutes/100.000 data	
Interface	Remote Alarm Contact, RS485	
Backup Battery	Yes	
Alarms		
Temperature	High/Low Temperature, High Ambient Temperature	
Electrical	Power Failure, Low Battery, Sensor Error	
System	Data Communication Failure, Door Ajar, Data Logger Failure	
Electrical		
Power Supply(V/Hz)	110V/60Hz	220~240; 50Hz/60Hz
Rated Current(A)	1.16A	0.9A/0.56A